

ELDORA -MICRO SERIES

36 Cell Polycrystalline Solar PV Module

This Data Sheet is Applicable for: *Eldora 80P*.

Features

- Designed ideally for Street Lighting Applications.
- Guaranteed(0 to +4.99) Wp positive power output tolerance , ensuring high return on investment.
- Extremely reliable product suiting all environmental conditions
- Engineered to provide excellent low light response.

Quality and Safety

- 25 year limited power output warranty **
- Rigorous quality control meeting the highest international standards
- ISO 14001 (Environmental Health and Safety) Certified Factory
- ISO 9001:2008 (Quality Management System) Certified Factory
- BSOHSAS 18001(Occupational Health & Safety)Certified Factory
- IEC 61215, IEC 61730 ,MCS Certified
- Certified for Salt Mist Corrosion Resistance (IEC 61701)
- Certified for Ammonia Resistance (IEC 62716)

Recommended Applications

- Street Lighting Applications



High efficiency solar cells with advanced texturing and passivation process which provides enhanced power output



High quality interconnecting ribbons used as a conductor which reduces power loss and increases efficiency and life of the solar module. This ribbon ensures the best soldering between solar cells.



Low Iron Tempered Glass with Special Textured and high light transmission and capture .



An IP65 and fire rated junction box, highly protected from moisture, dust and water. Ideal for good generation and measurement of electrical output . Consists of 10 A diodes, which prevent power loss resulting in no effect on the output.



High Dielectric Strength EVA with optimal gel content. Low water permittivity and UV Resistant Back sheets ensure durability up to 3000 hrs. of Damp Heat Test.

TECHNICAL DATA

ELDORA 80P

Electrical Data – All data refers to STC (AM 1.5, 1000 W/m², 25°C)



Type	Eldora 80P		
Nominal Power, P _{mpp} (0 ~+ 4.99 Wp)	74	75	80
Nominal Voltage, V _{mpp} (V)	17.90	17.99	18.09
Nominal Current, I _{mpp} (A)	4.14	4.17	4.43
Open Circuit Voltage, V _{oc} (V)	22.04	22.12	22.24
Short Circuit Current, I _{sc} (A)	4.46	4.49	4.76
Module Efficiency (%)	13.00	13.17	14.05

*Electrical Parameters' tolerance ± 3% except P_{mpp}

Temperature Coefficients (T_c) and permissible operating conditions

T _c of Open Circuit Voltage (β)	-0.31 %/°C
T _c of Short Circuit Current (α)	0.058 %/°C
T _c of Power (γ)	-0.41 %/°C
Maximum System Voltage	1000 V(TÜV)
NOCT	45°C ± 2°C
Temperature Range	-40°C to + 85°C



Mechanical Data

*NOCT irradiance 800 W/m², ambient temperature 20°C, wind speed 1 m/sec

Length	855 mm
Width	666 mm
Height	34 mm
Weight	6.8 kg
Junction Box	IP65, 2 Bypass Diodes
Cable & Connectors	N.A
Application Class	CLASS A (Safety Class II)
Superstrate	High Transmission Low Iron Tempered Glass
Cells	36 no's Poly-crystalline solar cells ; 2 or 3 bus bars
Cell Encapsulation	EVA (Ethylene Vinyl Acetate)
Back Sheet	Composite Film
Frame	Anodized aluminum frame with twin wall profile

Guarantees and Certifications

Product Warranty**	5 Years
Performance Guarantee**	Guaranteed Power Output of 90% for 12 years and 80% for 25 years
Approvals and Certificates	IEC 61215 Ed2, IEC 61730, IEC 61701, IEC 62716, MCS, PV Cycle

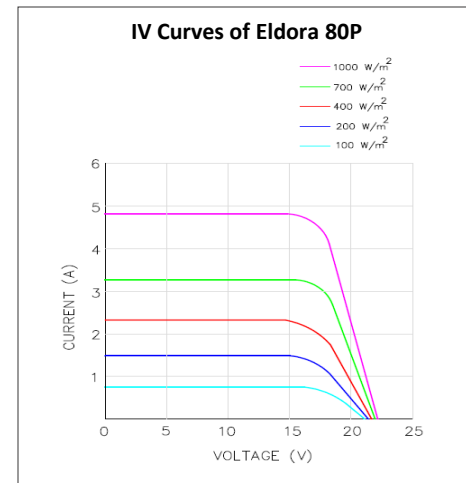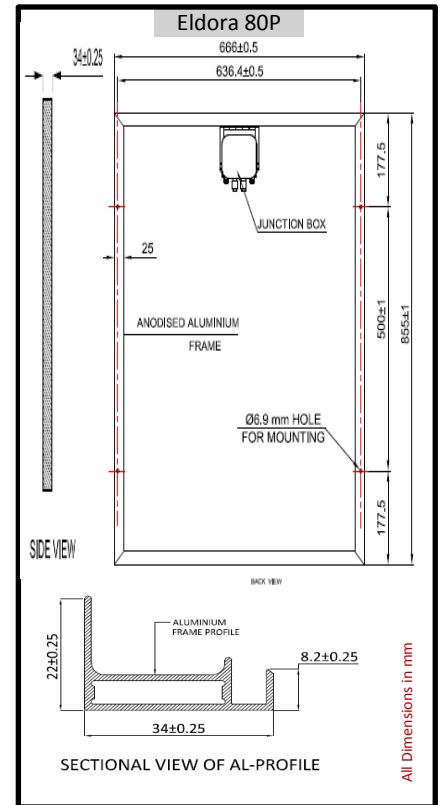

*CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT

** Refer to Vikram Solar's warranty document for terms and conditions

EUROPE

Vikram Solar GmbH

1st Floor, Harrlachweg 1, 68163 Mannheim, Germany
 Phone: +49 (0) 621 32 88 64 9-3, Fax: +49 (0) 621 32 88 64 9-5
 Email: europe@vikramsolar.com

INDIA

Vikram Solar Pvt Ltd

1, Old Court House Corner, 'Tobacco House' 4th Floor,
 Kolkata 700001, West Bengal, India
 Phone: +91 033 22307299, Fax: +91 033 22484881
 Email: info@vikramSolar.com